

96

Color, Proof



Soltis 96

Natural coolness and light

The ideal range of fabrics for furnishing your terrace or patio. Their micro-perforated design protects you from the sun's light and heat, while allowing air to pass through them.

96 Color

Micro-perforated fabric:

The fabric's micro-perforations allow air to circulate.

This avoids the greenhouse effect usually felt beneath a standard acrylic fabric.

- Natural light: The fabric's open nature allows light into your house. You'll enjoy natural light as well as a glare-free outward visibility, while remaining protected from the sun's rays because Soltis 96 blocks up to 97% of UV rays.

- Enduring colours: The fabric's unique design and its enduring, plain colours bring a touch of modernity to your terrace or patio.

- Durability: The colours' high UV resistance guarantees your fabric's long-term aesthetics. Its smooth surface resists dirt, mould and facilitates cleaning.

96 Proof

Waterproof fabric: it provides the ultimate in comfort on terraces, allowing them to be used in all seasons.

- Long-term effective and durable protection against inclement weather
- Reinforced mechanical resistance
- Low solar transmission resulting from better heat protection
- Glare reduced by improved protection
- Textured and lasting design
- Colours have strong resistance to UV



**Blocks up to 100%
of UV rays**


Soltis 96

Color




White

96-8102

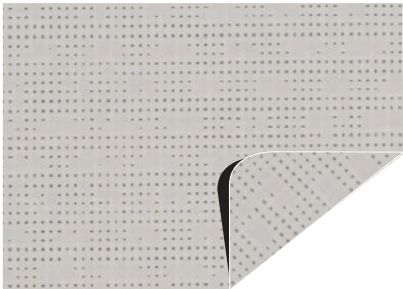


Shea

96-50843

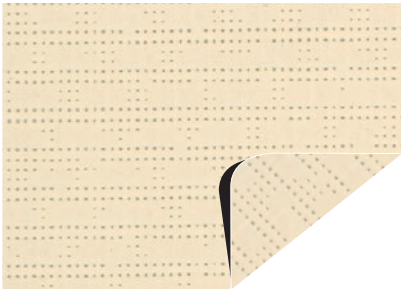


Off-white

96-1103

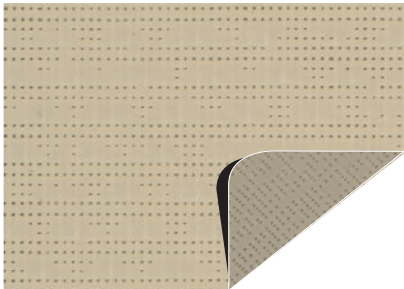


Vanilla

96-8861

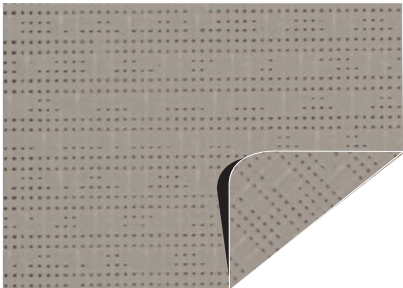


Sandy beige

96-2135

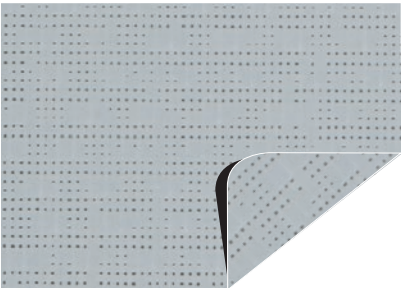


Cloud

96-50272

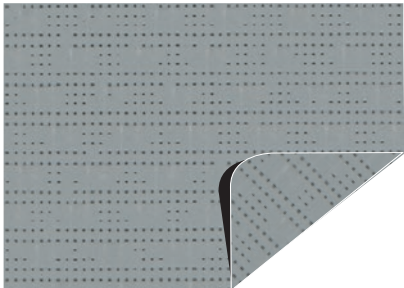


Boulder

96-2171

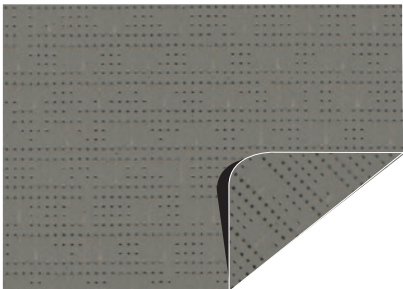


Mole

96-50850

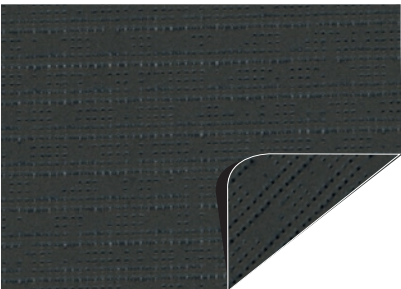


Bronze

96-2043

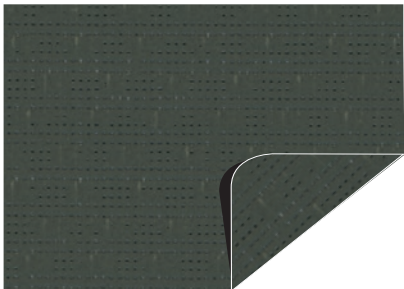


Jungle


96-50849

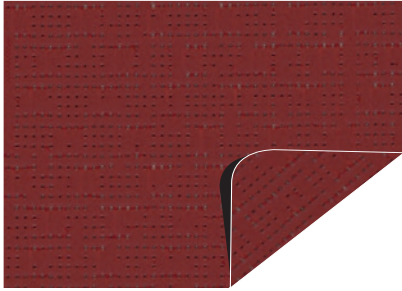


Red 96-8255

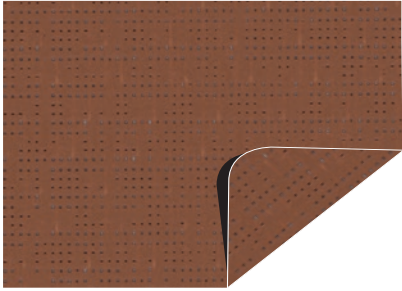


Caramel 96-50261

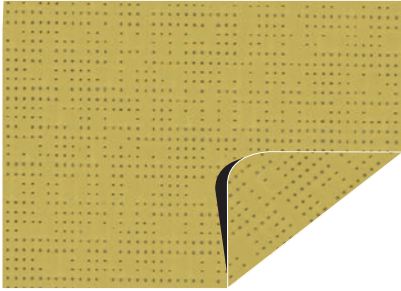


Aureolin 96-50845

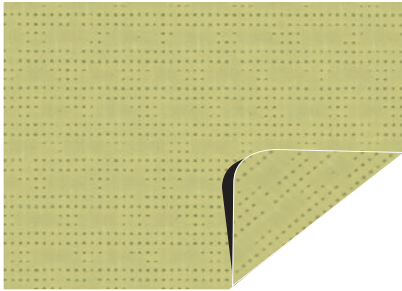


Citrus 96-50846

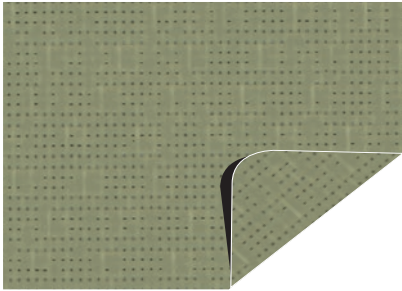


Lime 96-50848

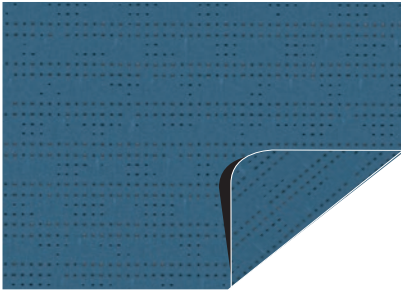


Acapulco 96-50847

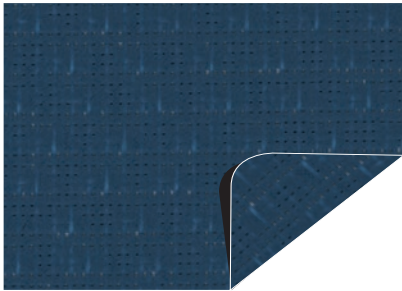


Atlantis 96-50851

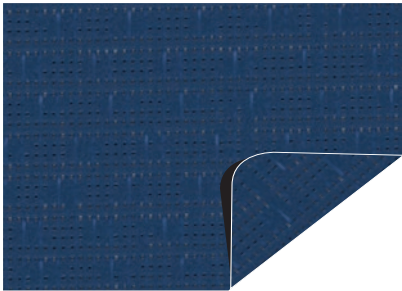


Midnight blue 96-2161

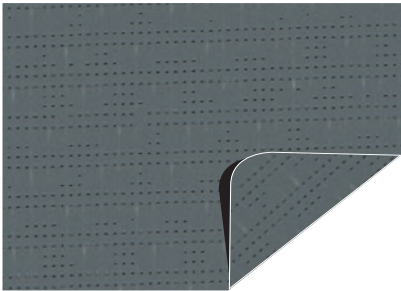

Platinum 96-50844

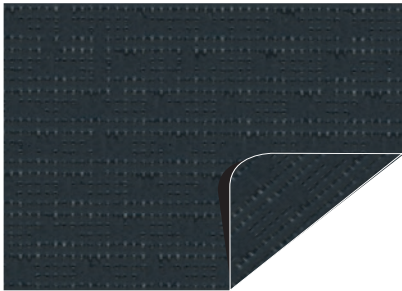

Anthracite 96-2047

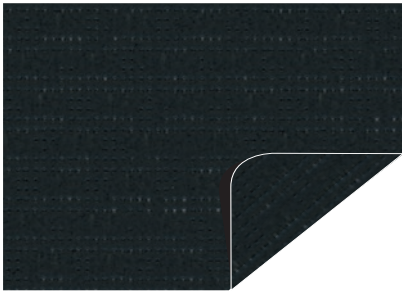


Black 96-8450


Proof




White W96-8102

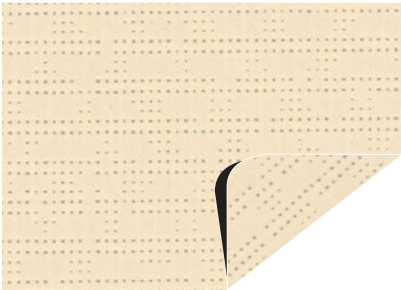


Off-white W96-1103

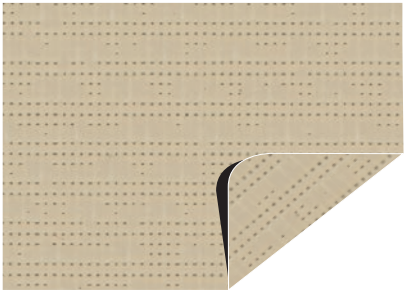

Vanilla W96-8861

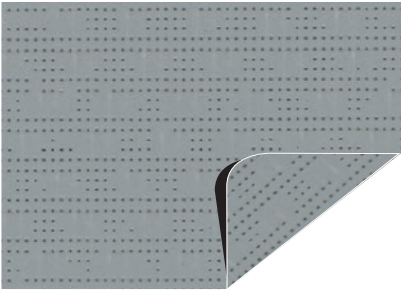


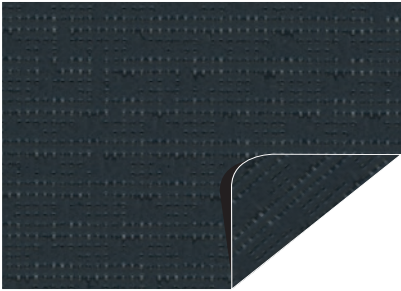




Boulder W96-2171



Anthracite W96-2047




Main applications

		Color	Proof
Exterior solar protection			
	Projection awnings	✓	
	Retractable arm awnings	✓	
	Wintergarden blinds	✓	
	Lateral pergola blind	✓	
	Retractable pergola roof	✓	✓
	Shade-sails	✓	✓
	Fixed pergola roof	✓	✓
	Rollable pergola roof	✓	✓
	Awning valances	✓	
	Wind shields	✓	

Exclusive Précontraint® technology

This unique, world-patented technology involves maintaining the composite in bi-axial tension throughout the manufacturing cycle. It ensures our materials' exceptional performance characteristics, which ensure they exceed market standards in terms of long-term stability, strength, coating thickness and flatness.

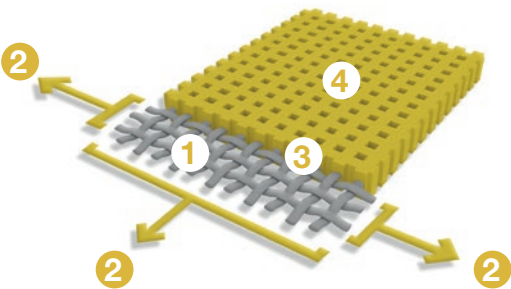











1	High-tenacity polyester micro-yarn reinforcing mesh	Higher resistance to elongation and tearing
2	Coating under bi-axial, warp and weft tension	No deformation during installation and usage
3	Coating thickness covering top of yarns and dirt repellent surface treatment	Enhanced aesthetic and structural durability
4	Extremely flat and thin	Easy-to-clean smooth surface ensuring compactness and easy rolling

Thermal And Light Transmission Properties

(according to EN 14501)


		Width (cm-in.)		TS	RS	AS	TV n-h	TUV (%)
		120 47.2	267 105.1					
Color								
96-1103			21	64	15	18	5	
96-2043			5	11	84	5	5	
96-2047			5	8	87	4	4	
96-2135			16	55	29	7	4	
96-2161			12	26	62	5	5	
96-2171			11	49	40	5	4	
96-8102			21	70	9	19	6	
96-8255			17	37	46	5	4	
96-8450			4	7	89	4	5	
96-8861			17	60	23	11	4	
96-50261			12	38	50	5	6	
96-50272			12	53	35	9	4	
96-50843			15	57	28	12	5	
96-50844			7	24	69	5	5	
96-50845			12	47	41	8	4	
96-50846			16	51	33	15	3	
96-50847			11	33	56	5	5	
96-50848			12	37	51	10	5	
96-50849			5	14	81	4	4	
96-50850			8	30	62	6	5	
96-50851			14	29	57	5	5	

Proof							
W96-1103			●	17	67	16	16
W96-2047			●	3	11	86	3
W96-2171			●	9	52	39	4
W96-8102			●	17	71	12	17
W96-8861			●	13	63	24	9

TS	Solar Transmission in %
RS	Solar Reflection in %
AS	Solar Absorption in %
TS + RS + AS	=100% of the incident energy
TV n-h	Normal Visible light transmission - hemispherical in %
TUV	UV transmission in %



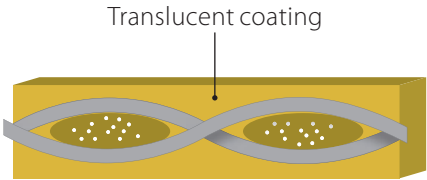

Translucent coating

Thanks to a translucent coating applied directly during the production process the product is 100% waterproof throughout its life. The coating avoids any risk of delamination and provides excellent UV resistance.



Soltis 96 Proof

Soltis 96

	Color	Proof
Technical properties		
Openness factor	4%	0%
Weight EN ISO 2286-2	400 g/m² • 11.8 oz/sq. yd	620 g/m² • 18.3 oz/sq. yd
Thickness	0.45 mm • 450 microns	0.56 mm • 560 microns
Width	120 cm - 267 cm • 47.2 in - 105.1 in	267 cm • 105.1 in
Roll length		
In 120 cm • 42.7 in. Width	40 lm • 43.74 yd	—
In 267 cm • 105.1 in. Width	40 lm • 43.74 yd	35 lm • 38.28 yd
Physical properties		
Tensile strength (warp/weft) EN ISO 1421	220/220 daN/5 cm • 495/495 lbs/2 in	220/220 daN/5 cm • 495/495 lbs/2 in
Tear strength (warp/weft) DIN 53.363	30/25 daN • 67/56 lbs	25/20 daN • 56/45 lbs
Sealing EN ISO 811		10,000 mm • 393.7 in
Fire resistance		
Rating	M2/NF P 92-507 B1/DIN 4102-1 Method 1/NFPA 701 CAN/ULC S109 AS/NZS 1530.2 AS/NZS 1530.3	M2/NF P 92-507 B1/DIN 4102-1 M2/UNE 23727 Class 1/EN 13773 Classe 2/UNI 9177 BS 5867-2 Schwerbrennbar-Q1-Tr1/ONORM A 3800-1 Method 1/NFPA 701 Method 2/NFPA 701 CSFM T19 Class A/ASTM E84 CAN/ULC S109 AS/NZS 1530.2 AS/NZS 1530.3 Group 1/AS/NZS 3837 G1/GOST 30244-94
Euroclass EN 13501-1	B-s2,d0	B-s2,d0
Management system		
Quality: ISO 9001 • Environment: ISO 14001 • Energy: ISO 50001		
Certifications, labels, warranty		
<div>Précontraint® Technology</div> <div>5-year warranty</div> <div></div> <div></div> <div></div> <div></div>		
Tools and Services		

Soltissim: tool to evaluate energy savings that can be achieved with Soltis solar protection. Contact your Serge Ferrari representative.

¹ Summarizes the group's CSR project focused on human, to align economic performance and positive impact.

The technical data above are averaged values with a +/-5% tolerance.
The purchaser of our products is responsible for their application or transformation in relation to possible third party rights. The purchaser of our products is responsible for their installation in compliance with the standards, working practices and safety regulations of their destination country. Please refer to our warranty document with regard to contractual liability.
Values quoted in this document are commonly used test results for design purposes. They are given for information only in order to offer our customers optimum usage of our products. Our products are subject to improvements resulting from technical developments and we reserve the right to modify their characteristics at any time. The purchaser of our products is responsible for checking the above data.
The colours and textures presented are included for information only.